

SMA TO WR-137 COAX TO WAVEGUIDE ADAPTER

5.85 GHz TO 8.2 GHz

SMA-WR137

KEY FEATURES

- C-band SMA female to WR-137 coaxial to waveguide adapter
- Durable all-metal body (aluminum)
- VSWR below 1.6:1 (typically below 1.2:1) with insertion loss less than 0.5 dB
- Professionally designed and hand-tested by engineers in the United States



SMA-WR137

SPECIFICATIONS

- Design: Round Flange with Right-Angle Feed
- Operating Frequency: 5.85 GHz to 8.2 GHz
- Body Material and Plating: Aluminum Alloy, Paint
- RF Connector Type: SMA Female
- RF Connector Body Material: Stainless Steel
- Waveguide Size: WR-137
- Flange: UG-441/U
- Length: 3.1 in [80 mm]
- Width: 3.1 in [80 mm]
- Height: 1.5 in [39 mm]

PERFORMANCE DATA


Parameter	Frequency	Min.	Typ.	Max.	Unit
VSWR	5.85 GHz – 8.2 GHz	—	1.2	1.6	—
Insertion Loss	5.85 GHz – 8.2 GHz	0.1	0.3	0.5	dB
Input Power	—	—	—	20	W
Impedance	—	50			Ω
Connector	—	WR-137 UG-441/U			—

SMA TO WR-137 COAX TO WAVEGUIDE ADAPTER


5.85 GHz TO 8.2 GHz

SMA-WR137

PERFORMANCE DATA (CONT.)

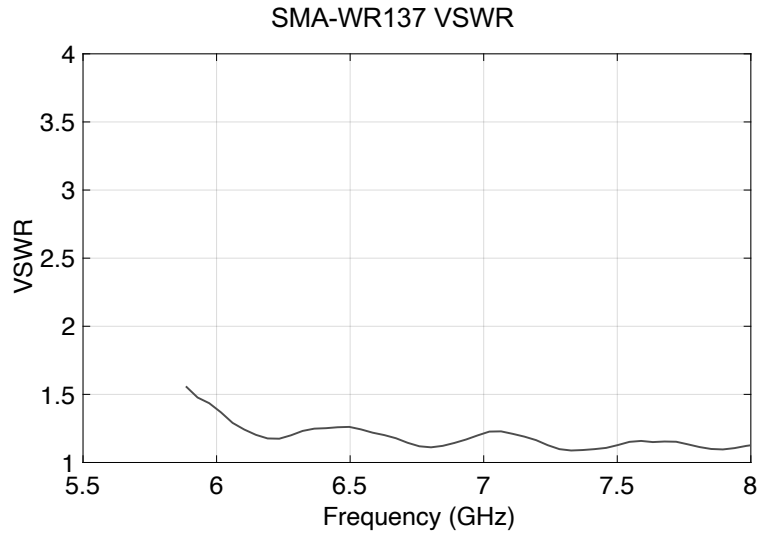

CAD DRAWING

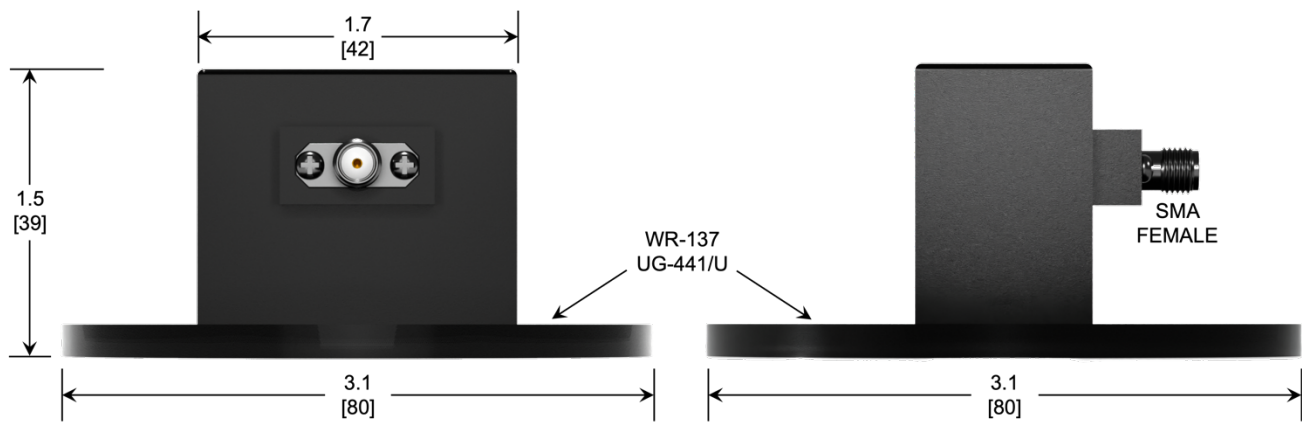

NOTES

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL
2. DIMENSIONS ARE IN INCHES [mm]
3. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME